



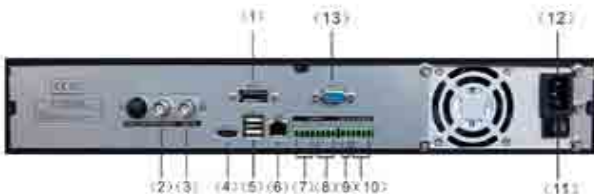

20CH 960P Full Realtime Network Video Recorder

Key Features

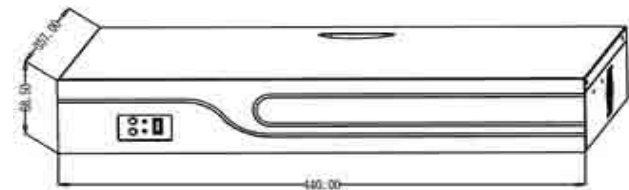

- » 20CH 960P full real time network input NVR(1.5U Case)
- » H.264 compression
- » Embedded linux operation system
- » Support synchronic video, playback, remote monitor, storage
- » VGA/HDMI sync output, support 1080P HD preview
- » Support 15 times electronic zoom preview and palyback image
- » Support EXT alarm, Bidirected-talk
- » Support WEB, mobile viewer, Client, CMS
- » Support DDNS,EMAIL,UPNP,NTP,P2P

**1.E-SATA 2.Audio Output 3.Bidirectional-talk input 4.HDMI Video Output
5.USB2.0 6.RJ45 7.Alarm Input 8.Ground terminal 9.RS485
10.Alarm Output 11.Power Switch 12.Power Supply 13.VGA Video Output**

● Technical Specifications

Model No	FX-NVR20DN
Video input	20CH 960P/16CH 1080P/4CH 3MP
Video Output	VGA/HDMI sync/1920×1080,1440×900,1280×1024,1366×768,1024×768,800
Video Input Resolution	3MP/1080p/960p/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Image Display	1/4/9/16/25
Audio Input	IPC complex audio input
Audio Output	1 CH, BNC port
Talkback	Bidirected-talk, BNC port
Interface	4 SATA, 1 eSATA HDD Capacity(Single 4T)
Backup Method	Network,USB storage device,USB recorder
Video Playback	Start,Stop,Fast play,Slow play, Frame play, Snapshot, Full screen,Roller amplification time ball precise playb
Protocol	TCP/IP,HTTP,DDNS,SMTP(SSL),DHCP,PPPOE,UPNP,NTP,ONVIF,P2P
Alarm Input/Output	4CH/2CH
Operation Temp And Humidit	'-10°C ~ 55°C/10% -90%
Power Supply	100~240V, 47Hz~63Hz (Power plug can be select)
Power Consumption	30W (Without HDD)
RS-485	1 RS485, support FS-KT301 keyboard
USB Port	3 USB2.0, support WIFI/3G Extensions

>> Specifications are subjected to change without prior notice.