


25CH 960P Full Real-time Network Video Recorder

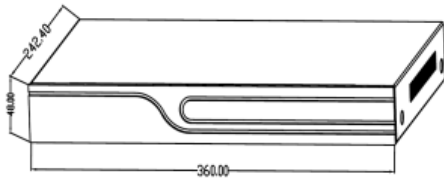

FX-NVR25N

Key Features

- 25CH 960P full real-time video access, 1U NVR case
- H.264 dual-stream compression, embedded linux operation system
- Support sync video recording, playback, remote monitoring, backup
- VGA/HDMI sync output, support 1080P HD preview
- Support 15 times electronic zoom preview and playback video image
- Standard ONVIF, GB28181 protocols optional
- Support alarm snapshot, Email sending
- Support DDNS, EMAIL, UPNP, NTP, P2P
- Support WEB, mobile viewer, Client, CMS
- Support bidirectional talk

Technical Specifications

Model	FX-NVR25N		
Video			
Video input	25CH 960P/ 16CH 3MP/ 9CH 5MP		
Video compression	H.264		
Video output	VGA/HDMI sync output 1920*1080, 1440*900, 1280*1024, 1366*768, 1024*768, 800*600		
Video bit rate	64-8000Kbps		
Video compression	1080P (downward compatibility)		
Image display	'1/4/6/8/9/16/20/25		
Snapshot	Support (BMP)		
Motion detection	396(22*18) surveyed area can be set in every screen and multi sensitivity adjustable		
AUDIO			
Audio compression	G.711A		
Audio input	IPC complex audio input		
Video output	1 CH, RCA port		
Bidirectional talk input	Bidirectional talk, RCA port		
VIDEO RECORDING AND PLAYBACK			
Video frame rate	1-30fps		
Record mode	Manual, alarm, MD, regular		
Sync playback	Support 8 CH 960P/ 4 CH 1080P/ 3MP/ 1 CH 5MP sync playback		
Search method	Time, calendar, event, channel		
Video playback	Start, stop, fast play, slow play, frame play, snapshot, full screen, roller amplification time ball precise playback		
STORAGE AND BACKUP			
Interface	2 SATA		
HDD capacity	Single max.6T		
Backup location	Local HDD, network storage		
Video playback	Network,USB storage device,USB recorder		
FUNCTION			
Network protocol	TCP/IP, HTTP, DDNS, SMTP(SSL), DHCP, PPPOE, UPNP, NTP, P2P, ONVIF		
Interface protocol	Onvif, RTSP, GB28181 optional		
Mobile surveillance	Support Apple, Android		
Internet explorer	Support IE, Chrome, Firefox, Safari		
Intelligent detection	Motion detection, video loss, privacy mask, tampering alarm		
Other	/		
EXT INTERFACE			
Network interface	RJ45 10M/100M adaptive Ethernet port		
RJ45 interface: /	Alarm input: /	Alarm output: /	ESATA: /
RS-485	1 RS485, support FS-KT301 keyboard control		
USB port	2, USB2.0, support WIFI/3G extensions		
GENERAL			
Power supply	DC12V/3A (Power plug can be selected)		
Power consumption	<10W (Without HDD)		
Operation temperature	-10°C ~ 55°C/10% -90%		
Dimension(mm)	360*242*48		
Weight/PCS(g)	2 Kg		

Specifications are subject to change without prior notice