



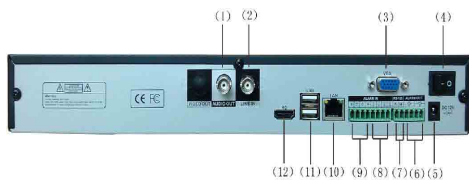

8CH 960P Full Realtime Network Video Recorder

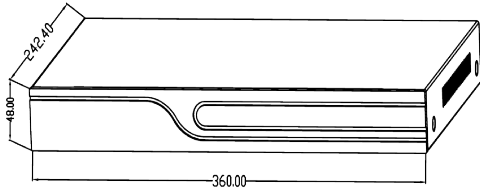

FEATURES:

- ◆ 8CH 960P full real time network input NVR with 1U Case
- ◆ H.264 compression
- ◆ Embedded linux operation system
- ◆ Support synchronic video, playback, remote monitor, storage
- ◆ VGA/HDMI sync output, support 1080P HD preview
- ◆ Support 15 times electronic zoom preview and palyback image
- ◆ Support EXT alarm
- ◆ Support DDNS,EMAIL,UPNP,NTP,P2P
- ◆ Support WEB, mobile viewer, Client, CMS

● SPECIFICATION:

Model	FX-NVR8DN		
Param			
VIDEO			
Video Input: 8CH 960P/8CH 1080P	Video compression: H.264 (High Profile@Level4.2)	Bit Rate: 16-8000Kbps	
Video Output Resolution: 1080p/960p/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF	Video compression: H.264 (High Profile@Level4.2)		
Video Output: VGA/HDMI sync output, 1920×1080, 1440×900, 1280×1024, 1366×768, 1024×768, 800×600	Image Display: '1/4/9		
Snapshot: Support(BMP)	Motion Detection: 396(22*18) surveyed area can be set in every screen and multi sensitivity adjustable(Need IPC Support)		
AUDIO			
Audio Encoding: G.711A	Audio Input: IPC Complex audio input	Audio Output: N/A,	Talkback: N/A
VIDEO RECORDING AND PLAYBACK			
Video Frame Rate: 1-30fps	Record Mode: Manual/Alarm/MD/Regular	Playback Synchronic: 4CH 960P/1 CH 1080P	
Search Method: Time,Calendar,Event,Channel	Video Playback: Start,Stop,Fast play,Slow play, Frame play, Snapshot, Full screen,Roller amplification time ball precise playback		
VIDEO BACKUP			
Interface: 2 SATA	HDD Capacity: Single 4T	Backup location:Local HDD, Network	
Backup Method:Network,USB storage device,USB recorder			
NETWORK MANAGEMENT			
Protocol: TCP/IP,HTTP,DDNS,SMTP(SSL),DHCP,PPPOE,UPNP,NTP,ONVIF,P2P			
EXT INTERFACE			
Network Interface: RJ45 10M/100M/1000M adaptive Ethernet port	USB Port: 2 USB2.0, support WIFI/3G Extensions		
Alarm Input: 4 CH	Alarm Output: 1 CH	RS-485: 1 RS485, support FS-KT301 keyboard	
GENERAL			
Operation Temp And Humidity: '-10°C ~ 55°C/10% -90%	Power supply: DC12V/3A (Power plug can be select)		
Power Consumption: 10W (Without HDD)	Unit Dimension(mm): L 360xW 242xH 48	Weight: 2 Kg	

● INTERFACE:

- | | | | |
|----------------------|-------------------|--------------------|----------------------|
| 1.Audio Output | 2.Bidirected-talk | 3.VGA Video Output | 4.Power Switch |
| 5.DC12V Power Supply | 6.Alarm Output | 7.RS485 | 8.Ground Terminal |
| 9.Alarm Input | 10.RJ45 | 11.USB2.0 | 12.HDMI Video Output |